



HYDRAULIC EXCAVATOR MULCHER

DML/HY 125

MULCHER WITH FIXED TEETH ROTOR FOR EXCAVATORS

Excavator weight between 10 and 13 tonne
*Up to 16 tonne when coupled with 'Hitch n Heel'



FEATURES

STANDARD EQUIPMENT ON NZ MODELS

'Hitch n Heel' excavator attachment	32/65cc variable manual displacement hydraulic piston motor, with relief and anticavitation valve
Anti dust machine body with enclosed motor	Belt transmission
Rear hood with hydraulic cylinder	Protection chains
Front hood with mechanical adjustment	
Welded counter blade	

OPTIONS

Rear hood with mechanical adjustment
Front hood with hydraulic cylinder
Electric hood control valve
Tooth options
Standard hitch



Blade E
Standard



Motor Enclosed Frame perfectly protected from dirt and impact

Steel Counter-Blades helps mulch material into a smaller final size

Hydraulic Rear Hood

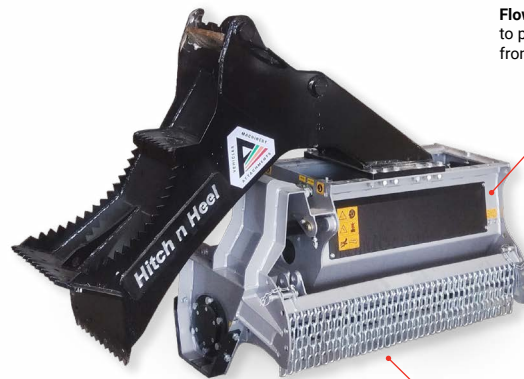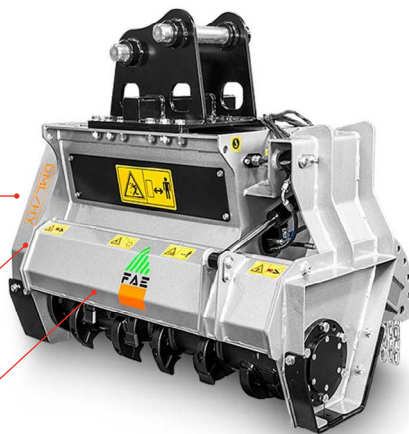

Flow Control Valve to protect the motor from excessive flow

Adjustable Front Hood for excellent mulching when operating in either direction. Hydraulic option available.

DML/HY 125	Flow Rate (L/min)		Pressure (bar)		Excavator weight (t.)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. blades (Type E)
	min	max	min	max	min	max				
32/65cc Hydraulic Piston Motor	100	180	180	250	10	16*	1240	510	120	30

Data refers to machine without options

STANDARD MULCHER PACKAGE INCLUDES

Active VMA 'Hitch n Heel'
Hydraulic Hose Kit (2x 3/4", 2x 3/8", 1x 1/2")
Delivery, Custom Hydraulic Motor Setting and Commissioning

