



HYDRAULIC EXCAVATOR MULCHER

PML/EX 100
MULCHER WITH FLAIL
ROTOR FOR EXCAVATORS

Weight between 5.5 to 7.5 tonne



FEATURES

STANDARD EQUIPMENT ON NZ MODELS

Customised attachment bracket	Belt transmission
Hydraulic hoses	27cc gear motor with integrated anticavitation valve
Rear roller	Anti dust machine body with enclosed motor
Welded counter blade	Flow control system valve
Rear hood with mechanical adjustment	2 hose N&B circuit compatible


OPTIONS

'Hitch n Heel' excavator attachment
17/34cc variable manual displacement hydraulic piston motor with relief and anticavitation valve (case drain circuit required)
Custom factory builds upon request

Flail
PML




Motor Enclosed Frame
Perfectly protected from dirt and impact

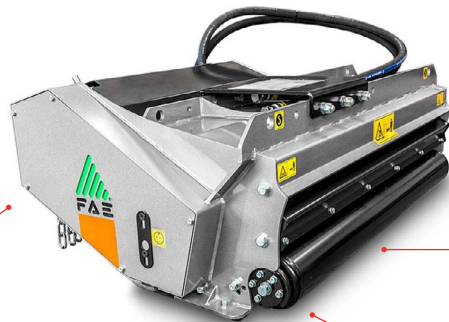

Flow Control System
valve to protect the motor from excessive flow

Self-cleaning support roller

Hydraulic Hoses

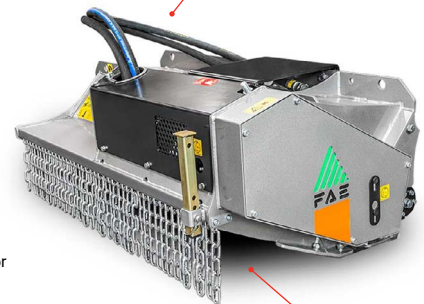

Steel Counter-Blades
Helps mulch material into a smaller final size

PML/EX 100 Mulcher with flail rotor for excavators	Flow Rate (L/min)		Pressure (bar)		Excavator weight (t.)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. flails
	min	max	min	max	min	max				
	55	85	180	210	5.5	7.5	1015	290	50	PML 16

Data refers to machine without options

STANDARD MULCHER PACKAGE INCLUDES

Active VMA 'Hitch'
Hydraulic Hoses (Factory supplied at fixed length)
Delivery, Custom Hydraulic Motor Setting and Commissioning

