



**EXCAVATOR STUMP CUTTER**

**SCL/EX/VT**

**DISC STUMP CUTTER FOR EXCAVATORS**

Weight between 7 and 15 tonne

\*Up to 23 tonne when coupled with 'Hitch n Heel'



**FEATURES**

**STANDARD EQUIPMENT ON NZ MODELS**

'Hitch n Heel' excavator attachment	110/60cc variable torque hydraulic piston motor
Flow control valve	Screwed protection chains
Hydraulic front hood	Anti dust machine body with enclosed motor
Motor integrated into the frame	Adjustable supporting service stand
Belt transmission	


**OPTIONS**

Diverter valve
Standard hitch
Custom factory builds upon request



**Motor Enclosed Frame**  
perfectly protected from dirt and impact

**Adjustable Supporting Service Stand**  
For storing the machine when not in use when not in use

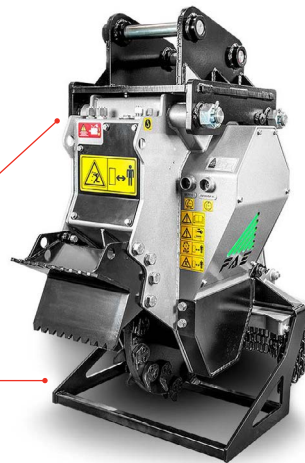

**Access panel**

**VT Variable Torque Motor**  
to increase performance and reduce operating cost

**Front hydraulic hood**  
with bolt-on chains/ protection plates



SCL/EX/VT Disc Stump Cutter	Flow Rate (L/min)		Pressure (bar)		Excavator weight (t.)		Rotor diameter (mm)	Total width (mm)	Weight (kg)	No. of teeth L1/L2/L3/L4
	min	max	min	max	min	max				
	100	160	180	350	7	23*	660	680	755	12+3+12+3

Data refers to machine without options

**STANDARD STUMP CUTTER PACKAGE INCLUDES**

Active VMA 'Hitch n Heel'
Hydraulic Hose Kit ( 2x1", 2x3/8", 1x1/2" )
Delivery, Custom Hydraulic Motor Setting and Commissioning

