



**EXCAVATOR STUMP CUTTER**

**SCM/EX/VT**  
**DISC STUMP CUTTER**  
**FOR EXCAVATORS**

Weight between 12 and 20 tonne  
\*Up to 30 tonne when coupled with 'Hitch n Heel'



**FEATURES**

**STANDARD EQUIPMENT ON NZ MODELS**

'Hitch n Heel' excavator attachment	160/115c variable torque hydraulic piston motor
Flow control valve	Screwed protection chains
Hydraulic front hood	Anti dust machine body with enclosed motor
Motor integrated into the frame	Adjustable supporting service stand
Belt transmission	

**OPTIONS**

Diverter valve
Standard hitch
Factory thumb
Custom factory builds upon request



**Motor Enclosed Frame**  
perfectly protected from dirt and impact

**Optional Factory Thumb**


**Adjustable Supporting Service Stand**  
For storing the machine when not in use



**Active VMA 'Hitch n Heel'**

**VT Variable Torque Motor**  
to increase performance and reduce operating cost

**Front Hydraulic Hood**  
with bolt-on chains/ protection plates

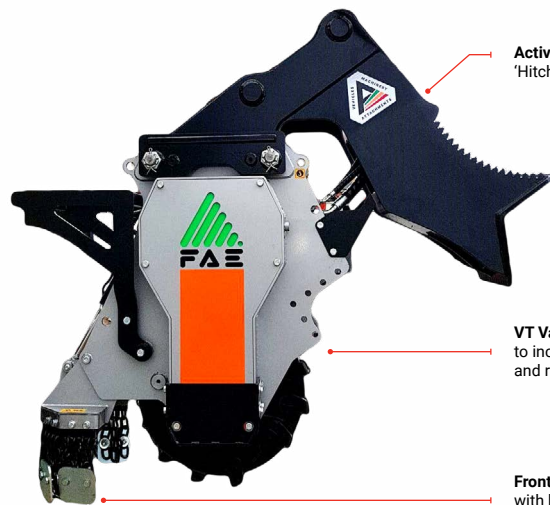

SCM/EX/VT Disc Stump Cutter	Flow Rate (L/min)		Pressure (bar)		Excavator weight (t.)		Rotor diameter (mm)	Total width (mm)	Weight (kg)	No. of teeth M1/M2/M3/M4
	min	max	min	max	min	max				
	120	220	220	350	14	30*	790	770	1020	12+3+12+3

Data refers to machine without options

**STANDARD STUMP CUTTER PACKAGE INCLUDES**

- Active VMA 'Hitch n Heel'
- Hydraulic Hose Kit ( 2x1", 2x3/8", 1x1/2" )
- Delivery, Custom Hydraulic Motor Setting and Commissioning

