



FORESTRY TILLER

SSL/DT 225 SPEED

**FORESTRY TILLER WITH
FIXED TOOTH ROTOR**

Forestry tiller for tractors between 100 and 220 HP with a max grinding diameter of 30 cm



FEATURES

STANDARD EQUIPMENT ON NZ MODELS

Friction clutch on side PTO	Flat pressed welded steel counter-blades
PTO shaft with cam clutch	Enclosed machine body
Gearbox with freewheel	Inside lateral protections
Transmission with side gearbox	Protection chains
Hydraulic hood	Hydraulic controlled roller

OPTIONS

Hydraulic top link
Multiple tooth options
Custom factory builds upon request

G/3
Standard Tooth




C/3/SS
Side Scraper Tooth




Dual transmission with side gearbox reduces rotor speed while maintaining power

Hydraulic controlled roller helps with minor compaction and working uneven terrain

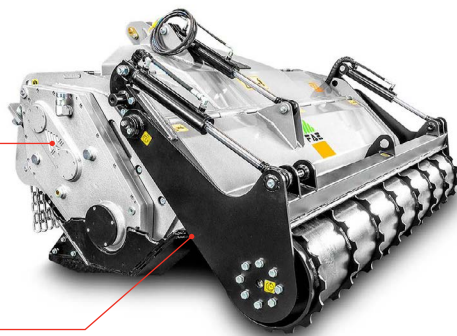

PTO driveshaft with cam clutch

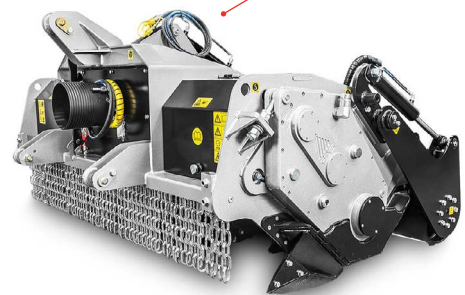

SSL 225 Forestry Tiller with Fixed Tooth Rotor	PTO (rpm)	Working width (mm)	Total width (mm)	Weight (kg)	Max shredding diameter (mm)	Max working depth (mm)	No. teeth type
	1000	2300	2600	2810	300	300	82+4

Data refers to machine without options

