




HYDRAULIC EXCAVATOR MULCHER

UML/HY/VT 125
MULCHER WITH FIXED TEETH
ROTOR FOR EXCAVATORS

Excavator weight between 12 and 16 tonne
*Up to 23 tonne when coupled with 'Hitch n Heel'

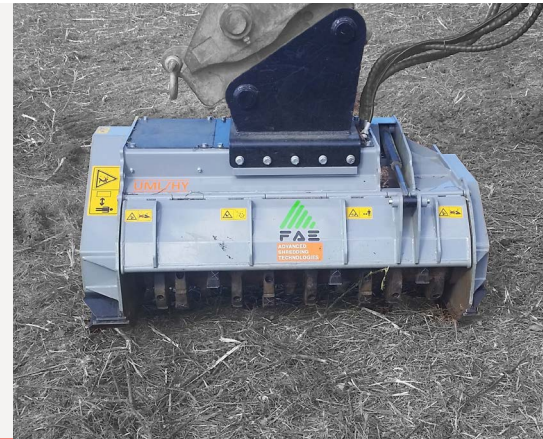

FEATURES

STANDARD EQUIPMENT ON NZ MODELS

'Hitch n Heel' excavator attachment	80/50cc variable torque hydraulic piston motor
Anti dust machine body with enclosed motor	Polychain belt transmission
Hydraulic hood with enclosed drive	Hydraulic valve with flow control, anticavitation and relief functions
Welded counter blade	
Bolted dual row protection chains	

OPTIONS

Electric hood control valve
Multiple tooth options
Standard hitch
Custom factory builds upon request

C/3 Standard Tooth
C/3/SS Side Scraper Tooth



VT Variable Torque Motor
Adjustable motor to obtain the maximum performance from any excavator

Motor Enclosed Frame perfectly protected from dirt and impact

Flow Control Valve to protect the motor from excessive flow

Steel Counter-Blades helps mulch material into a smaller final size



UML/HY/VT 125	Flow Rate (L/min)		Pressure (bar)		Excavator weight (t.)		Working width (mm)	Weight (kg)	Max shredding diameter (mm)	No. of teeth
	min	max	min	max	min	max				
Hydraulic Motor with Variable Torque	120	160	250	350	12	23*	1340	970	150	C/3+C/3/SS 26+2

Data refers to machine without options

STANDARD MULCHER PACKAGE INCLUDES

Active VMA 'Hitch n Heel'
Hydraulic Hose Kit (2x1", 2x3/8", 1x1/2")
Delivery, Custom Hydraulic Motor Setting and Commissioning

